

# AF799



## VSM ACTIROX



Grain type	Ceramic
Bonding	Full-resin bonded
Colour	Dark Petrol
Backing	Vulcanised fibre
Production width	1,470 mm

### Materials



Unalloyed steel



Stainless Steel



Aluminium



Non-ferrous metal

### Features



Medium to high pressure




Medium dose coated

## ACTIROX

The geometrically shaped ceramic grain generates maximum stock removal when machining unalloyed steel. A fast cut and an extremely long service life lead to a significant increase in productivity.

### Grit sizes:




16 20 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200

## Benefits

- > Maximum stock removal thanks to geometrically shaped ceramic grain leads to a reduction in operating costs
- > More than twice as much stock removal compared to conventional ceramic grain abrasives
- > Increase in productivity: More workpieces per unit of time due to fast cutting
- > Extremely stable dimensions and a durable vulcanized backing satisfy the highest safety requirements

## Grain technology

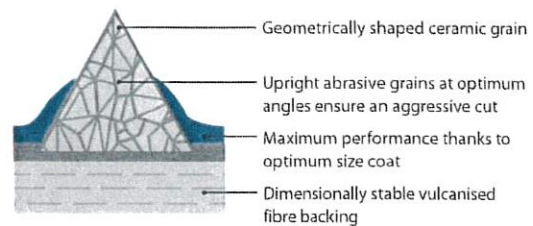

VSM · Vereinigte Schmirgel-  
und Maschinen-Fabriken AG  
Siegmondstraße 17 · 30165 Hannover · Germany  
T +49 511 3526 0 · F +49 511 3521 315  
sales@vsmabrasives.com · [www.vsmabrasives.com](http://www.vsmabrasives.com)



Subject to technical changes.