

KF808




VSM ALUMINIUM OXIDE




Grain type	Aluminium oxide
Bonding	Full-resin bonded
Colour	Red-brown
Backing	Vulcanised fibre
Production width	1,470 mm

Materials



Features



High-performance aluminium oxide abrasive. Ensures a cool grinding process thanks to an additional grinding-active TOP SIZE layer. KF808 is characterised by a long service life and optimum adaptability.


Grit sizes¹⁾:



Benefits

- > Long service life
- > High performance abrasive
- > Special coat for hand-held machines
- > Form-resistant backing
- > Optimal adaptation to the workpiece
- > Cool cutting

VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG
Siegmundstraße 17 · 30165 Hannover · Germany
T +49 511 3526 0 · F +49 511 3521 315
sales@vsmabrasives.com · www.vsmabrasives.com

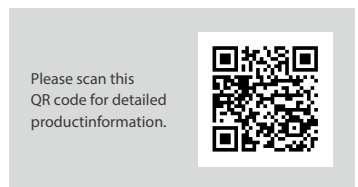

Please scan this QR code for detailed product information.

¹⁾ P = Categorized according to the FEPA standard. Subject to technical changes.